

OFFICE OF THE MARION COUNTY SURVEYOR

SECTION RECORD CORNER

SECTION 28 TOWNSHIP 17 RANGE 5

DATE: 8-16-04

PARTY CHIEF: Wilcoxon

CREW: _____

TYPE OF MARKER: Harrison


METHOD OF ESTABLISHMENT: County: 5-22-99

IN. S.P.C. E ZONE NAD '83

NAME: 17052804

N: 515463.0476(m)

E: 73532.3103(m)

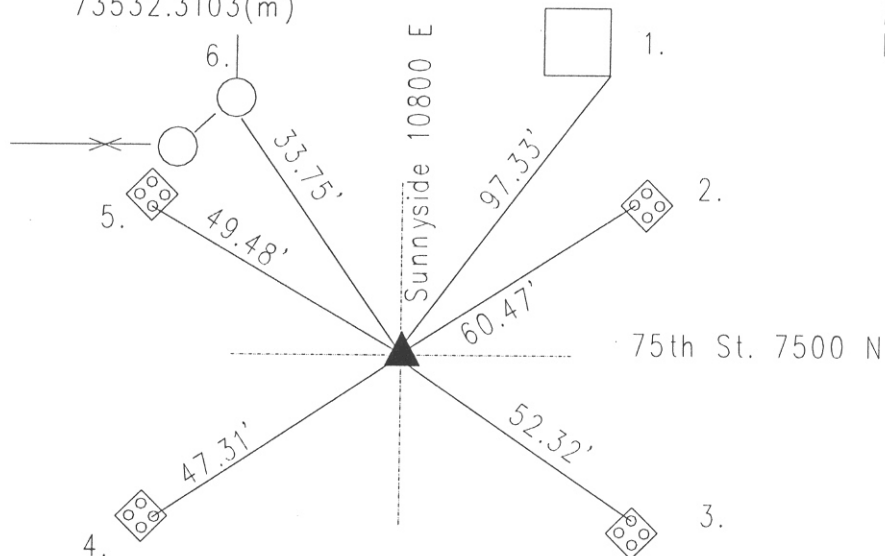

Original post set 1821 by Laughlin with witness: 20" poplar N 45 E 38 links; 14" elm S 5 links. Survey by Wilson 3-1854 per Lawrence Township Legal Survey Book 14 called corner "A" and stone. Legal 10-1874 by Voorhis per Lawrence Township Legal Survey Book 13 called corner "A" called rock found. Tie card called stone 2" down. Monroe 9-24-59 called ties added. 5-2-75 Fortner called road nail at surface. 8-15-79 Bruer called railroad spike, and once again, ties closely matched the earlier ties. Excavated 9-3-82 by Cleveland, railroad spike found at surface over high point of stone, 0.06' down. Stone removed and set Harrison. Re-tied by Kiste 10-25-94. Re-tied 5-22-99 by Wilcoxon. Re-tied 8-16-04 by Wilcoxon.

17052804

REF.	DISTANCE	DESCRIPTION
1.	97.33'	SE corner metal IBT box
2.	60.47'	Cut 'x' W-bolt of aluminum pole base
3.	52.32'	Cut 'x' N-bolt of aluminum pole base
4.	47.31'	Cut 'x' E bolt of aluminum pole base
5.	49.48'	Cut 'x' S bolt of aluminum pole base
6.	33.75'	Center corner steel fence post